


Electrical Engineering | Technology Offer Switching Loss Free 3-Level Pulse Width Modulation Inverter with Snubber Circuit - S3L – Inverter -

S3L- inverter

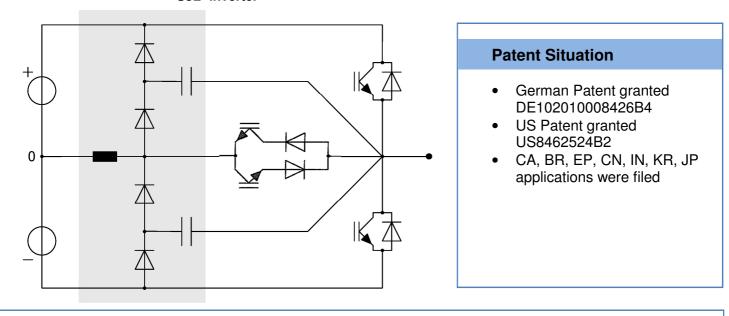

Field of Use

- Electric Drives
- Solar Power Inverter
- Wind Power Inverter
- Uninterruptible Power Supplies (UPS)

Advantages

- Free of switching losses due to its design / thus maximum efficiency (one phase or three phases) \rightarrow low heat generation \rightarrow small cooling elements and fans
- Very high switching frequencies possible → smaller and lighter smoothing inductors and capacitors
- Excellent EMC (Electromagnetic Compatibility) characteristics
- di/dt as well as du/dt limiting
- Use of low-cost standard semiconductors /IGBT, etc.

Technology Transfer

• The Technologie-Lizenz-Büro (TLB) GmbH is undertaking the commercialization of this technology and now offers companies the opportunity to obtain a **license**.

Further Information / Licence

Dipl.-Ing. Emmerich Somlo <u>esomlo@tlb.de</u>, <u>www.tlb.de</u>
Technologie-Lizenz-Büro (TLB) der Baden-Württembergischen Hochschulen GmbH
Ettlinger Straße 25, D-76137 Karlsruhe Tel. +49 721 79004-0, Fax +49 721 79004-79

Pulse width modulation inverters with ever higher switching frequencies and simultaneously increased efficiency are often being sought. Examples of such applications are electric drives in a variety of fields, such as ultra-light and high rpm drives in the aerospace industry and in hybrid cars, but also solar and wind power inverters as well as uninterruptible power supplies.

To meet these expectations, it is necessary to develop new switching topologies. A known approach is to use *multi-level inverters* which nowadays represent the current technology. A further approach is the *"soft switching"* technology which seeks to eliminate switching losses via resonant, quasi-resonant, or passively switching losses reducing topologies resulting in higher switching frequencies and improved efficiencies.

At the Laboratory for Power Electronics of the HTWG Konstanz, these two approaches have been successfully combined in a simple manner and with unique characteristics.

The new **Soft Switching Three Level Inverter (S3L – Inverter)** is of striking simplicity and is therefore inexpensive. Because of the underlying principle, it works without losses and thus with maximum efficiency. The inverter is easily controlled, has EMC friendly inherent di/dt- and du/dt limitation, and can be built using low-cost standard semiconductors.

Three phase prototype 20 kVA up to 1000 V_DC 29 A_rms Switching frequency 18 - 32 kHz



Inventor

Prof. Dr.-Ing. Manfred W. Gekeler Labor für Leistungselektronik Fakultät Elektrotechnik und Informationstechnik HTWG Konstanz - University of Applied Sciences Brauneggerstraße 55 78462 Konstanz Germany fon: ++49(0)7531-206-220 fax: ++49(0)7531-206-87-220 gekeler@htwg-konstanz.de



